

OS PERC 25

Mono Crystalline PV Module

200Wp/12V

RAL-200M36P10B

- 100 % EL Test to Ensure Error Free Module
- High Conversion Efficiency With High Reliability
- Uniform Electrical Performance
- Excellent Power Generation
- Excellent Anti-PID Performance
- Low Hot Spot Effect
- High Salt Mist Resistance



12 Years Product Warranty




30 Years Linear Power Warranty



1% Degradation for 1st year
 0.4% Annual Degradation Over 30 years.

Linear power performance graph

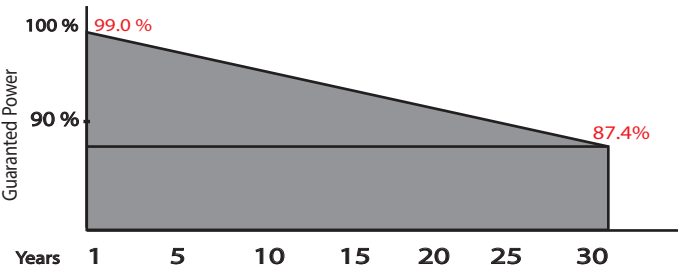

Complete System and Product Certifications

IEC 61215, IEC 61730, IEC 61701, IEC 62804, UL 61730
 ISO9001:2015: Quality Management System
 ISO14001:2015: Environmental Management System
 ISO45001:2018: Occupational Health and Safety

Mechanical Characteristics

Cell Type	Mono-crystalline PERC, 182 x 182mm
No. of Cells	36 (4*9)
Junction Box	IP65, 2-Diodes
Cable Cross-section size	4mm ²
Cable Length	±900mm (Cable can be customized)
Front Glass	3.2mm (High transmission, low iron tempered glass)
Encapsulant Material	POE/EVA
Protection Class	Class II
Fire Performance	Class C
Frame	Anodized Aluminium Alloy
Weight	11 kg
Module Dimensions	1330 x 765 x 35mm

*MC4 and MC4-EVO2 available upon request to availability

Packaging Configuration

Pallet Dimensions (L x W)	1400 x 1100mm
Packaging Configuration	47pcs/pallet, 376pcs/20' & 752pcs/40' Container

Specifications (STC)




Maximum Power - Pmax [Wp]	200
Maximum Power Voltage - Vmp [V]	20.48
Maximum Power Current - Imp [A]	9.78
Open-circuit Voltage - Voc [V]	24.38
Short-circuit Current - Isc [A]	10.45
Module Efficiency STC (%)	20.01
Power Tolerance	±5W
Temperature Coefficient of Pmax	-0.39%/°C
Temperature Coefficient of Voc	-0.33%/°C
Temperature Coefficient of Isc	0.06%/°C

Operating Conditions

Maximum System Voltage	1000 VDC (IEC)
Maximum Series Fuse Rating	20 A
Operating Temperature	- 40°C~+85°C
Voc and Isc Tolerance	±3%
Front Side Maximum Static Load	5400 Pa
Back Side Maximum Static Load	2400 Pa
NOCT	45±2°C

Remark: Customized frame color and cable length availabe upon request

Engineering Drawing

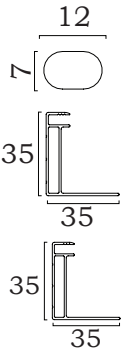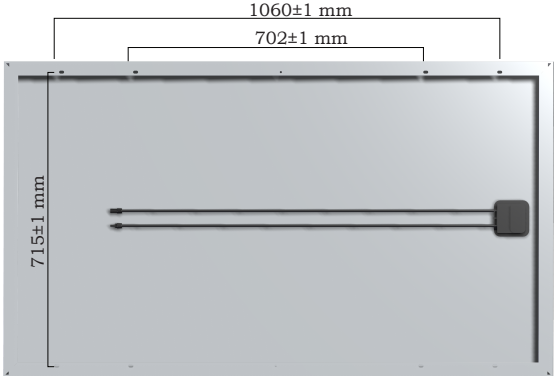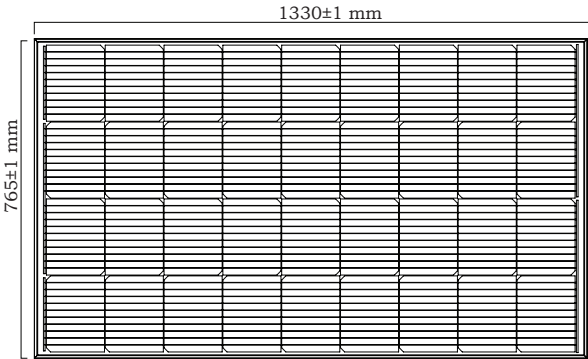

STC: Irradiance 1000W/m²

Cell Temperature 25°C

AM=1.5

Electrical Performance

